

Art-Nr. M113133

POP® IMEX AK

Dicht-Blindnieten

Produkteigenschaften

- mit Senkkopf
- Niete: Aluminium (AlMg 3.5)
- Dorn: Stahl phosphatiert



Technische Daten

Werkstoff Aluminium

Klassifikation

eClass 12.0 23-12-04-02


UNSPSC 11.2 31162201

eClass 10.1 23-12-04-02

eClass 11.0 23-12-04-02

Art-Nr.	VE	Bruttopreis	d1 mm	Typ	Klemmlänge mm	Ø Bohrung mm	d2 mm	d3 mm	k mm	l mm
10292679 794.120.109	100 Stk	16.00 / 100 Stk	3.2	AK 42 H a 100	1.6 - 3.2	3.3	5.6 - 6.3	1.63	1.4	8.7
10292680 794.120.110	1000 Stk	16.00 / 100 Stk	3.2	AK 42 H	1.6 - 3.2	3.3	5.6 - 6.3	1.63	1.4	8.7
10292681 794.120.114	100 Stk	17.00 / 100 Stk	3.2	AK 43 H a 100	3.2 - 4.8	3.3	4.6 - 6.3	1.63	1.4	10.2
10292682 794.120.115	1000 Stk	16.80 / 100 Stk	3.2	AK 43 H	3.2 - 4.8	3.3	4.6 - 6.3	1.63	1.4	10.2
10292683 794.120.129	100 Stk	20.10 / 100 Stk	3.2	AK 44 H a 100	4.8 - 6.4	3.3	5.6 - 6.3	1.63	1.4	11.8
10292684 794.120.130	1000 Stk	20.10 / 100 Stk	3.2	AK 44 H	4.8 - 6.4	3.3	5.6 - 6.3	1.63	1.4	11.8
10292685 794.120.134	100 Stk	21.10 / 100 Stk	3.2	AK 45 H	6.4 - 7.9	3.3	5.6 - 6.3	1.63	1.4	13.4
10292687 794.120.144	100 Stk	20.10 / 100 Stk	3.2	AK 46 H	7.9 - 9.5	3.3	5.6 - 6.3	1.63	1.4	15
10292689 794.120.199	100 Stk	21.80 / 100 Stk	4	AK 52 H	1.6 - 3.2	4.1	7.6 - 8.3	2.18	1.65	9.4
10292691 794.120.209	100 Stk	22.70 / 100 Stk	4	AK 53 H	3.2 - 4.8	4.1	7.6 - 8.3	2.18	1.65	11
10292693 794.120.219	100 Stk	22.70 / 100 Stk	4	AK 54 H	4.8 - 6.4	4.1	7.6 - 8.3	2.18	1.65	12.6
10292695 794.120.224	100 Stk	23.60 / 100 Stk	4	AK 55 H	6.4 - 7.9	4.1	7.6 - 8.3	2.18	1.65	14.2
10292697 794.120.269	100 Stk	24.30 / 100 Stk	4.8	AK 62 H	1.6 - 3.2	4.9	9 - 10.1	2.64	1.91	10
10292699 794.120.279	100 Stk	25.20 / 100 Stk	4.8	AK 64 H	3.2 - 6.4	4.9	9 - 10.1	2.64	1.91	13.2
10292701 794.120.334	100 Stk	25.20 / 100 Stk	4.8	AK 66 H	6.4 - 9.5	4.9	9.0 - 10.1	2.64	1.91	16.4
10292702 794.120.344	100 Stk	30.20 / 100 Stk	4.8	AK 68 H	9.5 - 12.7	4.9	9.0 - 10.1	2.64	1.91	19.6



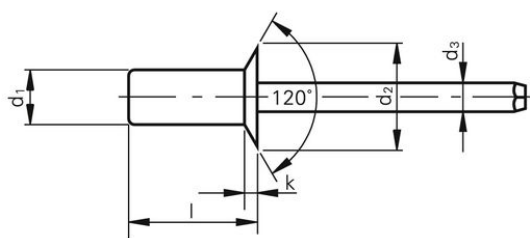

Alle Preise in CHF. Unsere Preise sind Richtpreise und unverbindlich. Lieferung erfolgt nur innerhalb CH/FL.

