

N° d'art. M107777

Bride pleine

Caractéristiques

- Exécution B
- Surface d'étanchéité entièrement usinée
- Exécution poinçonnée
- noir

Données techniques

EN 1092-1, type 05, forme A

DIN 2527

Nuance P250GH / S235JR

PN 40 bar

Classification

eClass 12.0 37-02-02-02


eClass 10.1 37-02-02-02

eClass 11.0 37-02-02-02

UNSPSC 11.2 40142403



N° d'art.	Prix brut	DN	D mm	b mm	Ø k mm	Vis mm	Poids kg
10033714 576.340.100	9.65 / pce	15	95	14	65	4 x M12-45	0.813
10033715 576.340.120	11.10 / pce	20	105	14	75	4 x M12-50	1.140
10033716 576.340.140	13.10 / pce	25	115	14	85	4 x M12-50	1.380
10033717 576.340.160	17.50 / pce	32	140	18	100	4 x M16-55	2.030
10033718 576.340.180	20.20 / pce	40	150	18	110	4 x M16-55	2.350
10033719 576.340.200	26.10 / pce	50	165	20	125	4 x M16-60	3.200
10033720 576.340.220	35.40 / pce	65	185	22	145	8 x M16-65	4.290
10033721 576.340.240	48.50 / pce	80	200	24	160	8 x M16-70	5.540
10033722 576.340.260	61.60 / pce	100	235	24	190	8 x M20-75	7.600
10033723 576.340.280	87.80 / pce	125	270	26	220	8 x M24-85	10.800
10033724 576.340.300	118.50 / pce	150	300	28	250	8 x M24-85	14.600
10033725 576.340.320	234.00 / pce	200	375	34	320	12 x M27-100	28.800

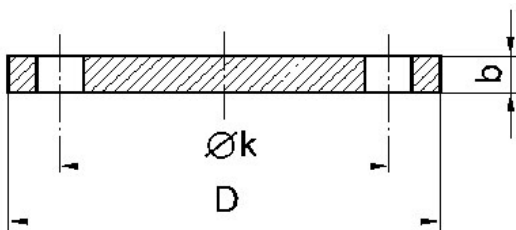

Prix en CHF. Les prix ont valeur indicative, sans engagement. Livraisons uniquement en Suisse et au Liechtenstein.

